



3G8080(I) / CD8080(I)
REPLACEMENT
GUIDE

tyco
Security Products

// Step #1 – Delete current Z-Wave devices and Image Sensors

1. Log into the Dealer account associated with the MFT site. Delete the image sensor from the equipment list of the account

Image Sensor List:

(Last Updated on 4/14/2015 9:51 am (EDT))

ID	MAC Address	Name	Status	Uploads this Month	Captures this Month	Power	Sensitivity	Signal Strength	Firmware Version	Last Battery Replacement (EDT)	Last Talk Time (EDT)	Rules Confirmed?			
124	001CFAF1000C055A	Garadge Door Image Sensor	Idle	1	3	3.43	Normal	65%	104.10	4/14/2015 9:41 am	4/14/2015 9:51 am	Yes	Delete	Power Cycle	Rename Sensor
125	001CFAF1000C03AA	Front Foyer Image Sensor	Idle	3	8	3.52	Normal	65%	104.10	4/14/2015 9:40 am	4/14/2015 9:49 am	Yes	Delete	Power Cycle	Rename Sensor
126	001CFAF1000B68FF	Basement Stairs Image Sensor	Idle	1	1	3.41	Normal	0%	104.0	4/14/2015 9:38 am	4/14/2015 9:36 am	Yes	Delete	Power Cycle	Rename Sensor

// Step #1 – Delete current Z-Wave devices and Image Sensors Cont.

2. Delete the Z-Wave Devices by using Advanced Z-Wave Commands from the equipment list of the account

Customer Support

- 2G Upgrade Programs
- Bulk Sub-Dealer Transfer
- Customer Info
- AirFX™ Remote Toolkit
- Customer Trouble Conditions
- Signaling

Equipment

- Event History
- Audit Changes
- Service Plan
- CS Forwarding Settings
- Login/Password Help
- Severe Weather

Current Record ★

Jitendra Patel (3476655)

Panel: PowerSeries Neo HS2128
Pre-release

Firmware: 1401183

Network: Rogers (HSPA_GPRS)

Join Date: 4/13/2015

Signaling Rating: Unknown

Tickets: Open (0) | Total (0)

Create New Ticket

Show Event Times In:

Rep Time Zone (EDT)

Overview | Sensors | Image Sensors | **emPower® Devices** | Video Devices

Learn more about emPower® by Alarm.com

Type: Z-Wave LiftMaster Solar

Refresh Page

Z-Wave Devices

Update

Rediscover Network | Test Link Quality | Edit Device Names | Get Equipment List | Show All Columns

All	Device ID	Type	Node ID	Gateway Device ID	Name	Mfr.	Info	Status	Status Date (EDT)	Rediscover Date (EDT)	Link Quality	Neighbors	Device Commands
<input type="checkbox"/>	1200	Z-Wave Light	2	127	Basement Game Area Lights	Jasco	Lamp Module	OK	4/14/2015 9:18 am	4/14/2015 3:31 pm	Good	3, 4, 5	1
<input type="checkbox"/>	1201	Z-Wave Light	3	127	Light/Appliance (ID:3)	Jasco	Appliance Module	OK	4/14/2015 9:18 am	4/14/2015 3:31 pm	Good	2, 3, 5, 6, 8	1
<input type="checkbox"/>	1202	Z-Wave Light	4	127	Light Dimmer (ID:4)	Jasco	Lamp Module	OK	4/14/2015 9:18 am	4/14/2015 3:31 pm	Good	2, 3, 5, 6	1
<input type="checkbox"/>	1203	Z-Wave Thermostat	5	127	Thermostat (ID:5)	RCS	Battery power TBZ48A	OK	4/20/2015 9:21 am	4/14/2015 3:31 pm	Good	2, 3, 4, 6, 8	1
<input type="checkbox"/>	1204	Z-Wave Light	6	127	Front Porch Lights	Leviton	n/a	OK	4/14/2015 1:59 pm	4/14/2015 3:31 pm	Good	3, 4, 5, 8	1
<input type="checkbox"/>	1206	Z-Wave Light	8	127	Front Pole Light	Zensys	n/a	OK	4/14/2015 3:32 pm	4/14/2015 3:31 pm	Good	3, 5, 6	

Advanced Z-Wave Commands

Z-Wave Remote Add/Delete Tool

The Z-Wave Remote Add/Delete Tool will allow you to put a panel into add or delete mode from across the home or across the country, making installs faster and easier.

Add Z-Wave Devices | Delete Z-Wave Devices



// Step #2 – Replacing the communicator

Open the front lid





// Step #2 – Replacing the communicator – cont.

Unsecure the original communicator board

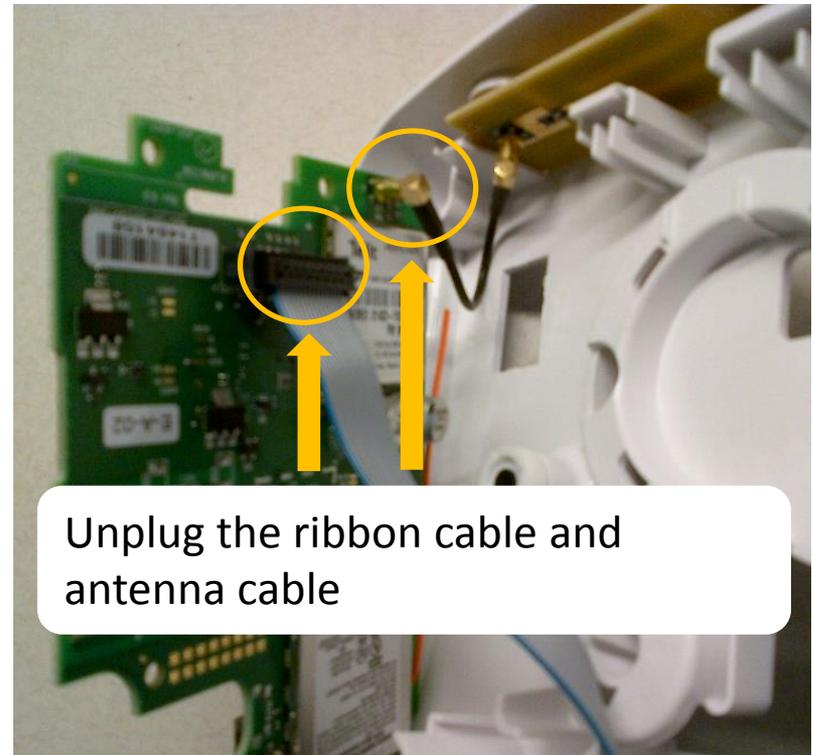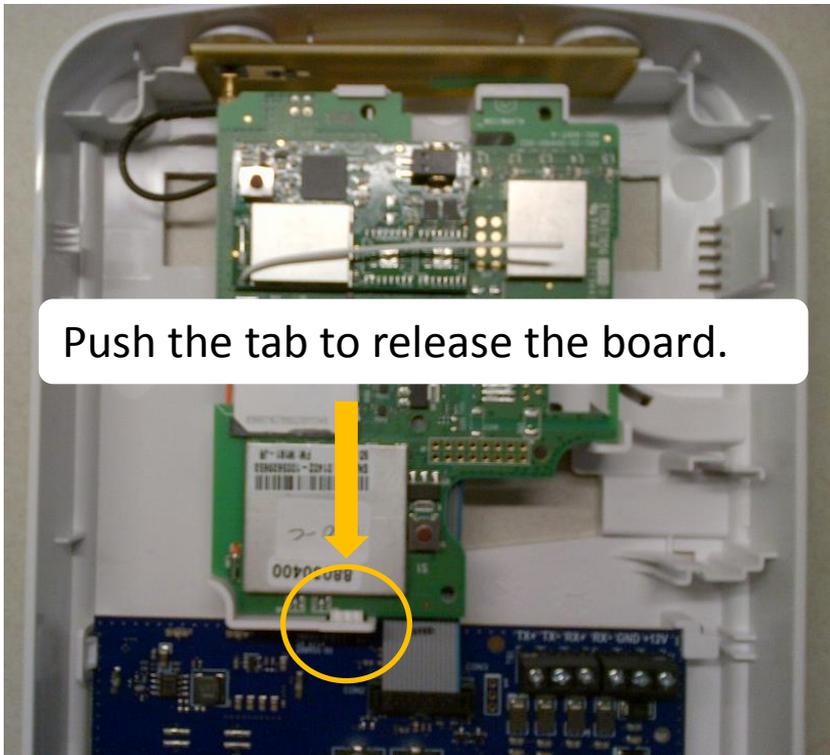



// Step #2 – Replacing the communicator – cont.

Install the new communicator board

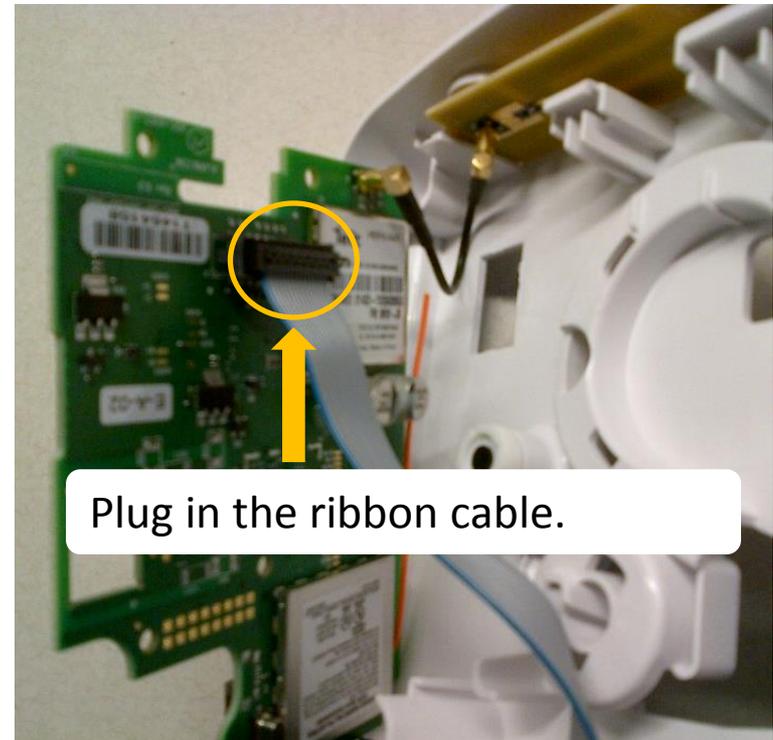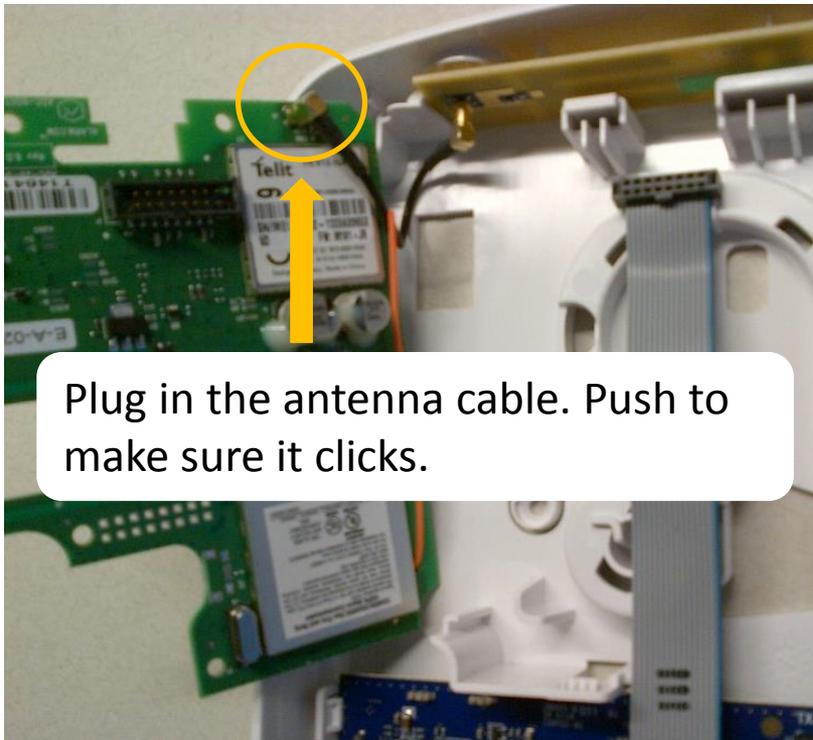

// Step #2 – Replacing the communicator – cont.

Finish the wiring and close the front lid.

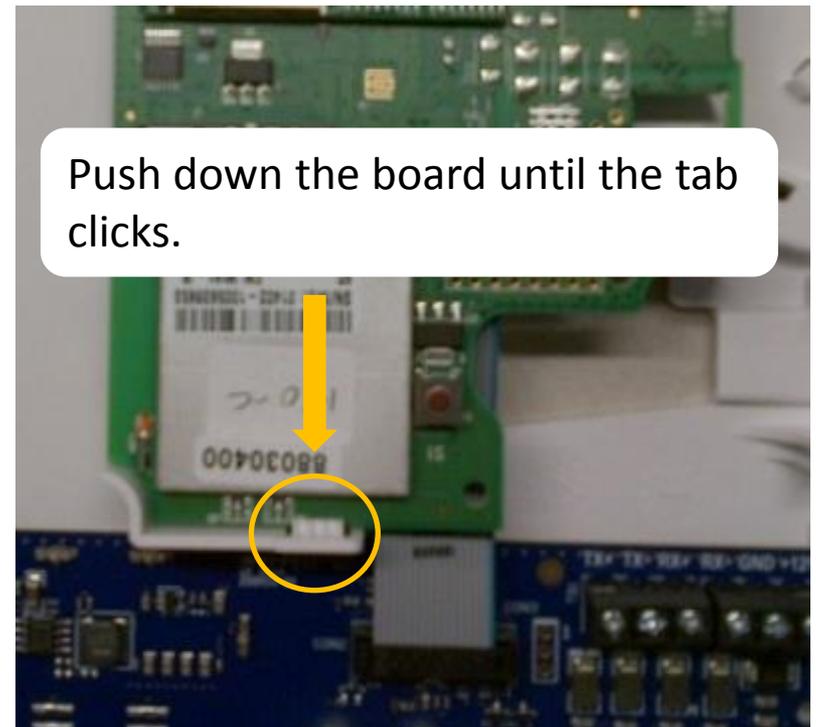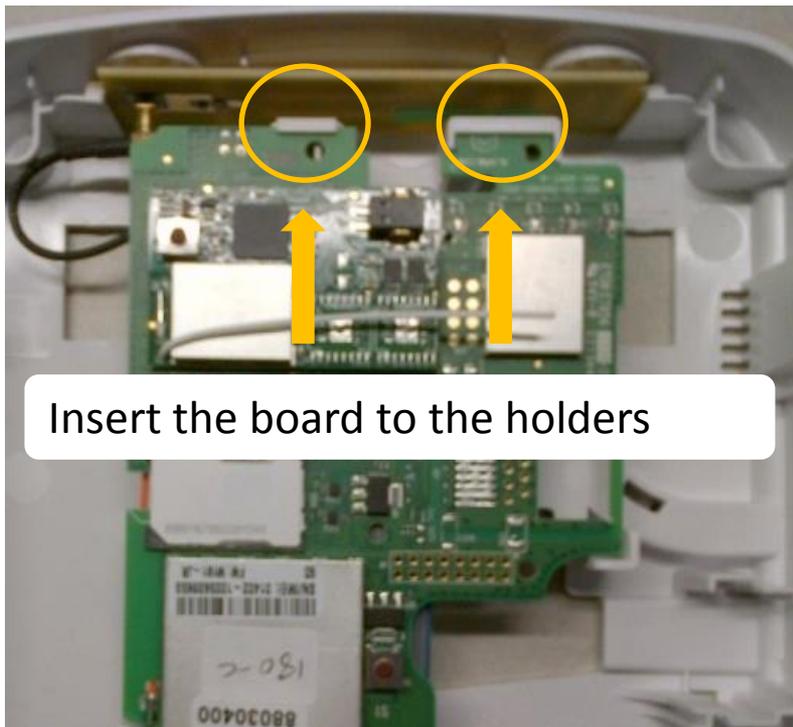

// The remaining steps...

3. Power up the system
4. Log in to the dealer portal and select “Module Swap” in the customer’s account
5. Follow the steps and enter the new S/N for the new communicator
6. Perform phone test on account.
7. Re-enroll Z-Wave and Image Sensor devices